

1994



SPECIAL SERVICE STATION WAGON

Caprice Classic Station Wagon Model 1BL35

Standard Equipment:

- 4.3 Liter V8 with SFI
- 4-speed automatic overdrive transmission
- Air Conditioning with environmentally friendly refrigerant
- All-season steel-belted radial ply tires (P225/75R-15 white stripe)
- Base-coat/ clear-coat paint
- Body-side Moldings
- Brakes: Four-wheel anti-lock brake system ABS (front disc/rear drum)
- Brake Transmission Interlock
- Child security rear door locks
- Cloth bench seats with front center armrest
- Comfortilt steering wheel
- Composite halogen headlamps
- Driver and passenger side (air bag) Supplemental Inflatable restraint system, manual lap/shoulder safety belts for all outboard seating positions; manual lap safety belts, center seating positions
- Dual outside rearview mirrors (LH remote)
- Electric digital speedometer with trip odometer and gauges
- Oil change monitor
- 8.5" Ring Gear Rear Axle
- Full Frame
- Full Wheel Covers
- Glove box lamp
- Headlamps-on reminder tone
- Intermittent windshield wipers
- Luggage compartment lamp
- Power Steering
- Scotchgard™ Fabric Protector includes carpeting
- Stainless steel exhaust
- AM/FM stereo radio with cassette seek/scan, digital clock and dual front door mounted and dual rear mounted speakers
- Tinted Glass
- Underhood lamp
- Wet-arm windshield washer system
- Wet-arm rear window washer system
- Full carpeting
- Carpeted floor mats front and rear
- Pass-Key Theft Deterrent (N/A with special service S/W)
- Illuminated Entry
- 15" x 7" Steel wheels

Special Service Station Wagon

To order Caprice Classic Special Service Station Wagon, model 1BL35 and Base Equipment Group BWAB plus 1A2 must be ordered. Additional RPO and SEO options may be ordered.

1A2 Features Include:

- Tires, P225/70R15 SBR Blackwall "Speed Rated" all season with full size spare tire (see tire chart for tire availability)
- Cooling Package, includes higher wattage dual electric fans, transmission oil cooler integral with radiator and heavy duty condenser
- Engine oil cooler (external)
- Power Steering Fluid Cooler (external)
- Alternator 140 amp Delcotron (See page 16 for specifications)
- Maintenance Free 770CCA heavy-duty battery (See page 16 for specifications)
- Doors and tailgate open warning light
- Air conditioning wide open throttle cut-off
- Air conditioning head pressure relief
- Transmission Low Gear Blockout (prevents manual downshift to first gear)
- Hoses-silicon radiator and heater includes worm drive hose clamps
- Digital Speedometer Certified 1 MPH increments 1 to 199 MPH, includes: Trip Odometer, Gauges (Oil, Temp, Volts) plus Warning Lights and Speedometer Light off switch
- Anti-Corrosion Hot Melt Pads under front and rear floor insulators
- Radio Bonding Strap Package
- Wiring Provision for Horn/Siren Circuit Connection (connection is used when Option 6J4 is ordered)
- Wiring Provision for Headlamp Flashing Unit (also used with Option 6J3)
- Auxiliary dome lamp
- Single Key Locking System-random key code for each vehicle; one key operates ignition and all other locks. (For single key to operate entire fleet, see Fleet Coded Single Key Locking System on page 6.)
- Heavy duty front bench seat with front seat armrest-cloth trim
- Auxiliary Junction Block in engine compartment
- Auxiliary Fuse Block provides six additional fused circuits at 20 amps each
- 15 x 7 H/D Steel Wheels
- Bolt on Center Caps

Powertrain

ENGINES	TYPE	DISPLACEMENT LITERS/CU. IN.	ENGINE FUEL SYSTEM	TRANSMISSION	AXLE RATIO
L99 Standard Single Exhaust	V8	4.3/265	Sequential Fuel Injection	MXO 4L60E Electric 4-speed Auto w/OD	*2.93
LT1 Optional Dual Exhaust	V8	5.7/350	Sequential Fuel Injection	MXO 4L60E Electronic 4-speed Auto w/OD	2.56

* Limited slip is available with 2.93 axle and 4.3L engine only (option G80).

See page 16 for engine specifications.

Tires: Speed Rated (must order one)

INCLUDED with 1A2 Special Service Package

SEO No.	MANUFACTURER	QUANTITY	SIZE	SPEED RATING	TYPE
5AQ & R4Y	Goodyear	Five	P225/70R15 SBR Blackwall	H	All Season (Eagle GT + 4)
5AQ & R4Z	General	Five	P225/70R15 SBR Blackwall	H	All Season (XP2000AS)

OPTIONAL with 1A2 Special Service Package

SEO No.	MANUFACTURER	QUANTITY	SIZE	SPEED RATING	TYPE
5AN	General	Five	P225/70R15 SBR White Stripe	H	All Season (XP2000AS)

Note: Speed ratings at 35 psi; 'H' rating 130 mph.

Seats

Heavy-Duty Front Seats

SEAT TYPE	VINYL (FRONT/REAR)		CLOTH (FRONT/REAR)		CLOTH-FRONT VINYL-REAR		AG1 SIX-WAY POWER SEATS AVAILABLE
Full Bench A52 (Incl. w/1A2)	Med. Blue	GDD1	Med. Blue	PDD1	Med. Blue	TDD1	N/A
	Med. Beige	GEE1	Med. Beige	PEE1	Med. Beige	TEE1	
Split 45/45 AS7 w/reclining seat back	Med. Blue	GDD4	Med. Blue	PDD4	Med. Blue	TDD4	Driver Only*
	Med. Beige	GEE4	Med. Beige	PEE4	Med. Beige	TEE4	
Split 55/45 AM6 w/armrest, reclining seat back	Med. Blue	GDD5	Med. Blue	PDD5	Med. Blue	TDD5	Driver Only*
	Med. Beige	GEE5	Med. Beige	PEE5	Med. Beige	TEE5	
Fold Down 2nd and 3rd Seat	2nd Seat is not Heavy Duty. 3rd Seat is not Heavy Duty and is only available in vinyl trim.						
	Color Selected for Front Seat Determines Rear Seat Color						

* AA7 Power Windows are required with AG 1 Power Seats

Note: Trim material will be same cloth as standard Caprice Classic cloth.

Special Equipment Options

Opt.

No. Description

6F8	ASHTRAY-Auxiliary, located in front doors
KD1	COOLER-Auxiliary external transmission oil (included with 5.7L engine)
6A3	COVERING-Rubber floor replaces production carpeting
6Y2	DELETE-3rd seat
6N1	HANDLE-Inside driver door releases lock when opening door
6B2	HANDLES-Rear door inoperative (doors can only be opened from outside)
6N5	HANDLES-Rear window inoperative
6B7	HOLE IN ROOF-On centerline (Requires 6F5 wiring) N/A with 6J5 hole
6J5	HOLE IN ROOF-On right side (Requires 6F5 wiring) N/A with 6B7 hole
6A4	KEYS-Single key system, each vehicle coded different included with 1A2 (random code)
6A5	KEYS-Single key system, fleet coded alike (specific key code)
6E2	KEYS-Single key system, fleet coded alike (specific key code)
6E8	KEYS-Single key system, fleet coded alike (specific key code)
7Y6	LAMP-Inoperative Dome
6N6	LOCKS-Rear door inoperative
B43	MAT- Load floor
B81	MOLDING DELETE-All body side
6Y1	MOLDING NON-INSTALLED-Body side, front doors only
6G2	ROOF REINFORCEMENT-Plate located on centerline of vehicle
7X6	SPOTLIGHT-Left hand
7X7	SPOTLIGHTS-Left and right hand
7X8	SPOTLIGHT PROVISION-Left hand
7X9	SPOTLIGHT PROVISION-Left and right hand
WX7	WIRING-Auxiliary speaker
6J3	WIRING-For grille lights, flashers, speakers and headlamp flashers
6J4	WIRING-For horn/siren circuit
6J1	WIRING-Ignition and main power supply (Replaces 7Z5 fuse Block incld. in 1A2)
6F5	WIRING-Roof, 10 wires (Requires 6B7 or 6J5 hole in roof)

For Detailed Descriptions of Special Equipment Options, see pages 8 thru 15.

Note: Vascar adapter not available from Chevrolet. Contact Traffic Safety Systems Inc. (Manufacturer of Vascar) at 804-353-3826 to purchase Vascar Electronic Odometer Module.

Regular Production Options

Opt. No.	Description
AG1	ADJUSTER- Six-way power seat, driver (Requires AA7 power windows)
G80	AXLE- Rear, limited slip differential (2.93 axle ratio)
C49	DEFOGGER- Rear window
AU3	DOOR LOCKS- Power
K05	HEATER- Engine block
VK3	LICENSE PLATE BRACKET- Front
BF9	MAT DELETE- Carpeted front and rear
DG7	MIRRORS- Outside dual electric remote (Requires AU3 power door locks)
DC4	MIRROR-Inside rearview day/night with reading lamps
DF6	MIRROR- Inside rearview automatic day/night with reading lamps
AP9	NET- Cargo area
UL5	RADIO DELETE- Speakers, speaker wires and antenna remain
K34	SPEED CONTROL- Electronic, with resume speed
G67	SUSPENSION- Auto leveling
PB1	WHEEL COVERS- Deluxe (plastic)
P03	WHEEL COVERS- Full stainless steel
N91	WHEEL COVERS- Wire with locks
AA7	WINDOWS- Power with driver express down with passenger window lock-out switch on drivers door

1994 Specifications and Dimensions

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

GENERAL	
Wheelbase:	115.9
Overall length:	217.3
Overall width:	79.6
Overall height:	60.8
Tread Front:	62.1
Tread Rear:	64.1

FRONT COMPARTMENT	
Head Room:	39.6
Shoulder Room:	63.4
Hip Room:	56.9
Leg Room: (Maximum)	42.2

REAR COMPARTMENT	
Head Room:	(3rd seat 36.6) 39.4
Shoulder Room:	(3rd seat 48.6) 63.5
Hip Room:	(3rd seat 43.7) 57.1
Leg Room: (Minimum)	(3rd seat 30.5) 38.0

LUGGAGE COMPARTMENT CAPACITY	
Cargo Volume (rear seats down)	92.7
Cargo Length (2nd seat up)	54.7
Cargo Width (at wheelhousing)	48.7

FUEL TANK CAPACITY	
(gal.)	22.0

AERODYNAMICS	
Coefficient of drag	.34

EPA FUEL ECONOMY RATINGS	CITY/HIGHWAY
4.3L Engine	16/23
5.7L Engine	15/23

Projected EPA label values, actual mileage will vary with options, driving conditions, driving habits and vehicle's condition.

ALTERNATOR	
Type:	Delco CS-144
Amps	140
Amps @ idle	72/108

FEATURES:

- Sealed High Capacity Bearings
- Transient Voltage Spike Protection
- Low Power Consumption
- Vehicle Low Voltage Idle Boost
- Compatible
- Load Response Control
- Reduced RFI

ENGINE	STD.	OPT.
Type	(L99) V8	(LTI) V8
Displacement: Liters (cu. in.)	4.3 (265)	5.7 (350)
Horsepower/RPM:	200 @ 5200	260 @ 5000
Torque/RPM:	245 @ 2400	330 @ 3200
Induction System:	SFI	SFI
Compression Ratio:	9.9:1	10.0:1
Exhaust:	Single	Dual

TRANSMISSION	
Automatic with overdrive	4-Speed

BRAKES	
Dual hydraulic:	Disc/Drum
Front: size/swept area (sq. in.)	12" x 1" / 242.3
Rear: size/swept area (sq. in.)	11" x 2" / 137.0
Total brake-swept area: (sq. in.)	379.0

TIRES	
Type:	All Season Speed Rated
Size: ('H' Rated)	P225/70R15


WHEELS	
Type:	Vented Steel
Size:	15 x 7

CHASSIS	
Frame:	Full Perimeter Steel
Front Suspension:	Independent - SLA, Coil Steel Alloy Spring, Steel Anti-Roll Bar, Tuned Shocks
Rear Suspension:	Salisbury 4-Link, Coil Steel Alloy Spring, Steel Anti-Roll Bar, Tuned Shocks
Steering Type:	Power, Internal Gear with Power piston Vane Type Pump
Steering Ratio:	14:1

BATTERY	
Type:	Delco Freedom
BCI Group Size:	78
Volts	12
Cold Cranking Amps @ 0°F (-18°C):	770
Reserve Capacity @ 80°F (27°C):	115

- #### FEATURES
- Maintenance-Free Design
 - Built-In Hydrometer
 - Reinforced Polypropylene Case
 - Built-In Flame Arrester
 - Side Mounted Terminals

CHEVROLET POLICE V8 GENERATOR MAXIMUM OUTPUT

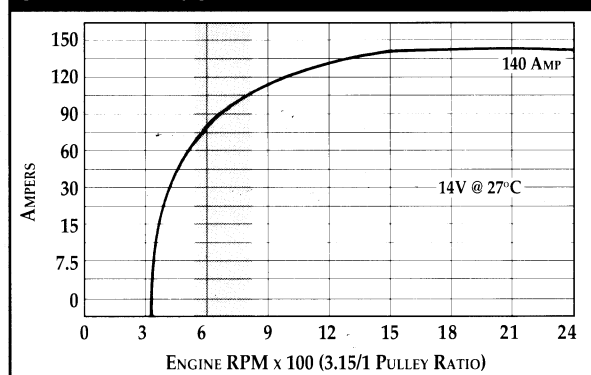

COMPUTER CONTROLLED IDLE SPEED RANGE (575-800 RPM)