

1995
SPECIAL SERVICE STATION WAGON
PACKAGE



Caprice Classic Station Wagon

Standard Equipment Summary:

- 5.7 Liter V8 engine with SFI
- 4-speed electronic automatic overdrive transmission
- External air-to-oil transmission cooler
- 8.5" Ring Gear Rear Axle with 2.56 ratio
- Air Conditioning with environmentally friendly refrigerant (R134A)
- All-season steel-belted radial ply tires (P225/75R-15 whitewall)
- Brakes: Four-wheel anti-lock brake system (front disc/rear drum)
- Brake Transmission Interlock
- Power Steering
- Stainless steel exhaust
- 15" x 7" Steel wheels
- Full Wheel Covers
- Full Frame
- Base-coat/ clear-coat paint
- Wide Body-side moldings
- Composite quartz-halogen headlamps with replaceable bulbs
- Dual rear-folding outside mirrors (LH remote)
- Tinted Glass
- Wet-arm windshield washer system
- Wet-arm rear window washer system
- Intermittent windshield wipers
- Comfortilt steering wheel
- Cloth 55/45 front seat with center armrest
- Scotchgard™ Fabric Protector Seats & Carpeting
- Full carpeting
- Carpeted floor mats front and rear
- Driver and passenger side Supplemental Inflatable restraint system (air bags), manual lap/shoulder safety belts for all outboard seating positions; manual lap safety belts for center seating positions
- Side-guard door beams
- Energy absorbing steering column
- Power door locks
- Child security rear door locks
- Pass-Key Theft Deterrent (N/A with Special Service station wagon)
- Electric digital speedometer with trip odometer, gauges, oil change and low oil indicators.
- Headlamps-on, seatbelt and key reminder tone
- AM/FM stereo radio with cassette, seek-scan, digital clock, dual front door mounted speakers and dual rear mounted speakers
- Delayed illumination entry system
- Underhood lamp
- Glovebox lamp
- Luggage area lamps

Special Service Station Wagon

To order Caprice Classic Special Service Station Wagon, model 1BL35 and Base Equipment Group 1SFX plus 1A2 must be ordered. Additional RPO and SEO options may be ordered.

1A2 Features Include:

The following equipment is in addition to or replacing items included in the standard equipment summary.

- Tires, P225/70R15 SBR Blackwall "Speed Rated" all season with full size spare tire (see tire chart for tire availability)
- Cooling Package, includes dual electric fans, transmission oil cooler integral with radiator and heavy duty condenser
- Engine oil cooler (external)
- Power Steering Fluid Cooler (external)
- Hoses-silicon radiator and heater includes worm drive hose clamps
- Alternator 140 amp Delcotron (See specifications section for information)
- Maintenance Free 770CCA heavy-duty battery (See specifications section for information)
- Transmission Low Gear Blockout (prevents manual downshift to first gear)
- 15 x 7 Heavyduty Steel Wheels
- Bolt-on center hub caps
- Air conditioning wide open throttle cut-off
- Air conditioning head pressure relief
- Digital Speedometer Certified 1 MPH increments 1 to 199 MPH, includes: Trip Odometer, Gauges (Oil, Temp, Volts) plus Warning Lights and off switch for Speedometer Light
- Single Key Locking System-random key code for each vehicle; one key operates ignition and all other locks. (For single key to operate entire fleet, see Fleet Coded Single Key Locking System on page 5.)
- Heavy duty front 45/45 Bucket seats with minimum 9" center spacing
- Anti-Corrosion Hot Melt Pads under front and rear floor insulators
- Radio Bonding Strap Package
- Wiring Provision for Horn/Siren Circuit Connection
- Wiring Provision to permit customer installation of a headlamp flashing system
- Auxiliary Junction Block in engine compartment
- Auxiliary Fuse Block provides six additional fused circuits at 20 amps each
- Auxiliary dome lamp
- Doors and tailgate open warning light (When Dome Lamp Inoperative Option 7Y6 is ordered, warning light operates only when tailgate is ajar and side doors open do not operate the warning light.)

Note: For detailed description of Special Equipment Options see Illustrations Section.

Powertrain

(No other powertrains available with station wagon)

ENGINE				TRANSMISSION		AXLE	
OPTION	TYPE	DISPLACEMENT LITERS/CU. IN.	FUEL SYSTEM	OPTION	TYPE	OPTION	RATIO
LT1 Dual Exhaust Standard	V8	5.7/350	Sequential Fuel Injection	MXO	4L60E Electric 4-speed Auto w/OD	GM8	2.56

Note: Limited slip is not available with the 1A2 Public Service Wagon.

See specifications section for Powertrain Information.

Tires: Speed Rated (must order one)

INCLUDED with 1A2 Special Service Package

SEO No.	MANUFACTURER	QUANTITY	SIZE	SPEED RATING	TYPE
5AQ & R4Y	Goodyear	Five	P225/70R15 SBR Blackwall	H	All Season (Eagle GT + 4)
5AQ & R4Z	General	Five	P225/70R15 SBR Blackwall	H	All Season (XP2000AS)

Note: Pending successful completion of tire testing and evaluation, the P225/70R15 "H" rated tire may be upgraded during the model year by a P225/70R15 "V" rated tire at no extra charge.

OPTIONAL with 1A2 Special Service Package

SEO No.	MANUFACTURER	QUANTITY	SIZE	SPEED RATING	TYPE
5AN	General	Five	P225/70R15 SBR White Stripe	H	All Season (XP2000AS)

Note: Speed ratings at 35 psi; 'H' rating 130 mph.

Seats

Heavy-Duty Front Seats

SEAT		VINYL (FRONT/REAR)		CLOTH (FRONT/REAR)		CLOTH-FRONT VINYL-REAR		POWER SEATS AVAILABLE*
TYPE	OPTION	COLOR	CODE	COLOR	CODE	COLOR	CODE	
Split 55/45 w/armrest, reclining seat back	AM6	Med. Blue	30NX	Med. Blue	30EX	Med. Blue	30DX	Driver (AG1) and Passenger (AG2)
		Med. Beige	64NX	Med. Beige	64EX	Med. Beige	64DX	
Bucket 45/45 w/reclining seat back	AS7	Med. Blue	30NX	Med. Blue	30EX	Med. Blue	30DX	
		Med. Beige	64NX	Med. Beige	64EX	Med. Beige	64DX	
Fold Down 2nd and 3rd Seat		2nd Seat is not Heavy Duty. 3rd Seat is not Heavy Duty and is available only in vinyl trim.						
		Color Selected for Front Seat Determines Rear Seat Color						

* AA7 Power Windows are required with AG1 Power Seats

Note: Seat Option and Color Code must be specified

Special Equipment Options

For Detailed Descriptions of Special Equipment Options, see Illustrations section.

No.	Description
6F8	ASHTRAY - Auxiliary, located in front doors
6A3	COVERING - Rubber floor replaces production carpeting (N/A with carpeted mats)
6Y2	DELETE - 3rd seat
6N1	HANDLE - Inside driver door releases lock when opening door
6B2	HANDLES - Rear door inoperative (doors can be opened only from outside)
6N5	HANDLES - Rear window inoperative
6B7	HOLE IN ROOF - On centerline (Requires 6F5 wiring) N/A with 6J5 hole
6J5	HOLE IN ROOF - On right side (Requires 6F5 wiring) N/A with 6B7 hole
6A4	KEYS - Single key system, each vehicle coded differently (Standard with Special Service Wagon)
6A5	KEYS - Single key system, fleet coded alike (specific key code, replaces 6A4)
6E2	KEYS - Single key system, fleet coded alike (specific key code, replaces 6A4)
6E8	KEYS - Single key system, fleet coded alike (specific key code, replaces 6A4)
7Y6	LAMP - Inoperative Dome
6N6	LOCKS - Rear door inoperative
B43	MAT - Load floor
B81	MOLDING DELETE - All body side
6Y1	MOLDING NON-INSTALLED - Body side, front doors only
6G2	ROOF REINFORCEMENT - Plate located on centerline of vehicle
7X6	SPOTLIGHT - Left hand
7X7	SPOTLIGHTS - Left and right hand
7X8	SPOTLIGHT PROVISION - Left hand
7X9	SPOTLIGHT PROVISION - Left and right hand
WX7	WIRING - Auxiliary speaker
6J1	WIRING - Ignition and main power supply (Replaces 7Z5 fuse Block included in 1A2)
6J3	WIRING - For grille lights, grille light flasher and grille speakers
6J4	WIRING - For horn/siren circuit, inline connection for customer furnished switch
6F5	WIRING - Roof, 10 wires (Requires 6B7 or 6J5 hole in roof)

Note: Vascar adapter not available from Chevrolet. Contact Traffic Safety Systems Inc. (Manufacturer of Vascar) at 804-353-3826 to purchase Vascar Electronic Odometer Module.

Regular Production Options

No. Description

AG1	ADJUSTER - Six-way power seat, driver (requires AA7 power windows)
AG2	ADJUSTER - Six-way power seat, passenger
C49	DEFOGGER - Rear window. If Rear Window Defogger not desired Order R9W
K05	HEATER - Engine block
VK3	LICENSE PLATE BRACKET - Front
BF9	MAT DELETE - Carpeted front and rear
DE3	MIRRORS - Outside dual electric remote
DC4	MIRROR - Inside rearview day/night with reading lamps, requires rear reading lamps (C96) when DC4 is ordered
DF6	MIRROR - Inside rearview automatic day/night with reading lamps, requires rear reading lamps (C96) when DF6 is ordered
AP9	NET - Cargo area
UL5	RADIO DELETE - Speakers, speaker wires and antenna remain
UL0	RADIO - AM/FM stereo seek/scan, music search cassette, auto tone and digital clock
K34	SPEED CONTROL - Electronic, with resume speed
G67	SUSPENSION - Auto leveling rear shock absorbers
PB1	WHEEL COVERS - Deluxe (plastic)
P03	WHEEL COVERS - Full stainless steel
N91	WHEEL COVERS - Wire with locks
AA7	WINDOWS - Power with driver express down with passenger window lock-out switch on drivers door

1995 Specifications and Dimensions

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

GENERAL	
Wheelbase:	115.9
Overall length:	217.3
Overall width:	79.6
Overall height:	60.8
Tread Front:	62.1
Tread Rear:	64.1

FRONT COMPARTMENT	
Head Room:	39.6
Shoulder Room:	63.4
Hip Room:	56.9
Leg Room: (Maximum)	42.2

REAR COMPARTMENT	
Head Room:	(3rd seat 36.6) 39.4
Shoulder Room:	(3rd seat 48.6) 63.4
Hip Room:	(3rd seat 43.7) 57.1
Leg Room: (Minimum)	(3rd seat 30.5) 38.0

LUGGAGE COMPARTMENT CAPACITY	
Cargo Volume (rear seats down)	92.7
Cargo Length (2nd seat up)	54.7
Cargo Width (at wheelhousing)	48.7

FUEL TANK CAPACITY	
(gal.)	22.0

AERODYNAMICS	
Coefficient of drag	.34

EPA FUEL ECONOMY RATINGS	CITY/HIGHWAY
5.7L Engine	17/25


Projected EPA label values, actual mileage will vary with options, driving conditions, driving habits and vehicle's condition.

Amps	140
Amps @ idle	72/108

FEATURES:

- Sealed High Capacity Bearings
- Transient Voltage Spike Protection
- Low Power Consumption
- Vehicle Low Voltage Idle Boost
- Compatible
- Load Response Control
- Reduced RFI

CHEVROLET POLICE VS GENERATOR MAXIMUM OUTPUT

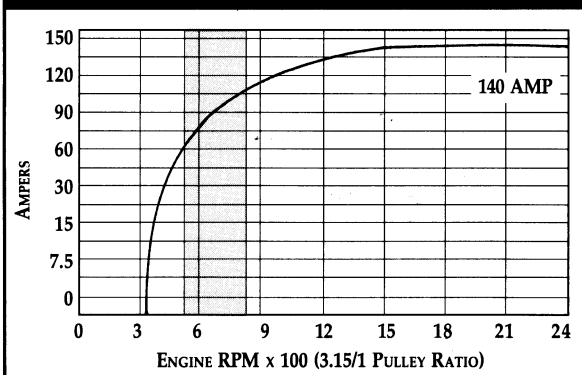

COMPUTER CONTROLLED IDLE SPEED RANGE (575-800 RPM)

ENGINE	OPT.
Type	(LTI) V8
Displacement: Liters (cu. in.)	5.7 (350)
Horsepower/RPM:	260 @ 5000
Torque/RPM:	330 @ 3200
Induction System:	SFI
Compression Ratio:	10.0:1
Exhaust:	Dual

TRANSMISSION	
Automatic electronic with overdrive	4-Speed

BRAKES	
Dual hydraulic:	Disc/Drum
Front: size/swept area (sq. in.)	12" x 1" /242.3
Rear: size/swept area (sq. in.)	11" x 2" /137.0
Total brake-swept area: (sq. in.)	379.0

TIRES	
Type:	All Season Speed Rated
Size: with ('H' Rated)	P225/70R15

WHEELS	
Type:	Vented Steel
Size:	15 x 7

CHASSIS	
Frame:	Full Perimeter Steel
Front Suspension:	Independent - SLA, Coil Steel Alloy Spring, Steel Anti-Roll Bar, Tuned Shocks
Rear Suspension:	Salisbury 4-Link, Coil Steel Alloy Spring, Steel Anti-Roll Bar, Tuned Shocks
Steering Type:	Power, Internal Gear with Power piston Vane Type Pump
Steering Ratio:	14:1

BATTERY	
Type:	Delco Freedom
BCI Group Size:	78
Volts	12
AMP Hour Rating	69
Cold Cranking Amps @ 0°F (-18°C):	770
Reserve Capacity @ 80°F (27°C):	115

FEATURES

- Maintenance-Free Design
- Built-In Hydrometer
- Reinforced Polypropylene Case
- Built-In Flame Arrester
- Side Mounted Terminals