

1994



CAPRICE POLICE PACKAGE

Caprice Classic Model 1BL19

Standard Equipment:

- 4.3 Liter V8 engine with SFI
- 4-Speed automatic overdrive transmission
- Air Conditioning with environmentally friendly refrigerant
- All-season steel-belted radial ply tires (P215/75R-15 blackwall)
- Base-coat/clear-coat paint
- Body-side moldings
- Brakes: Four-wheel anti-lock brake system ABS (front disc/ rear drum)
- Child security rear door locks
- Cloth bench seats with front center armrest
- Comfortilt steering wheel
- Brake transmission interlock
- Composite halogen headlamps
- Driver and passenger side (air bag) Supplemental Inflatable restraint system, manual lap/shoulder safety belts for all outboard seating positions; manual lap safety belts, center seating positions.
- Dual outside rearview mirrors (LH remote)
- Electric digital speedometer with trip odometer and gauges
- Oil change monitor
- Full Frame
- Full Wheel Covers
- Glove box lamp
- Headlamps-on reminder tone
- Intermittent windshield wipers
- Luggage compartment lamp
- Power Steering
- Scotchgard™ Fabric Protector Seats & Carpeting
- Stainless steel exhaust
- 15" x 7" steel wheels
- AM/FM stereo with seek-scan, digital clock, dual front door mounted and dual rear mounted speakers
- Tinted Glass
- Underhood lamp
- Wet-arm windshield washer system
- Full Carpeting
- Carpeted floor mats front and rear
- Pass-Key Theft Deterrent (N/A with Police Package)
- Illuminated Entry

Caprice Classic 'LS' Model 1BN19

The following equipment is in addition to or replacing items included in the standard equipment summary.

- 15" x 7" Aluminum Wheels (HD steel wheels and wire wheel covers required with police package)
- Cloth 55/ 45 split seat with armrest
- Power Driver Seat
- Electronic Speed Control
- Deluxe interior trim including trunk
- Door-mounted courtesy lamps
- Dual reading lamps in rear-view mirror includes rear seat reading lamps
- "Caprice Classic LS" exterior emblems
- Body side pin striping
- Power door locks
- Power windows with driver express down and passenger window lock-out switch
- AM/FM stereo with seek-scan, stereo cassette tape player with auto reverse, Extended Range Sound System, and digital clock
- Luggage compartment area hold-down net
- Power Dual Electronic outside mirrors
- Power Trunk Opener

Caprice Classic Police Package

To order Caprice Classic Police Package, model 1BL19 and Base Equipment Group BLAB plus 9C1 must be ordered. Additional RPO and SEO options may be ordered.

9C1 Features Include:

- Heavy duty full perimeter frame
- 8.5" ring gear rear axle
- Special Police Pursuit Suspension includes front and rear stabilizer bars, special springs and shocks, firm-feel steering, and specific body mounts
- Tires, P225/70R15 SBR Blackwall "Speed Rated" All Season with full size spare tire. See tire chart for tire availability
- Semi-metallic front and rear disc brake linings with larger rear wheel cylinders
- Cooling Package, includes higher wattage dual electric fans, transmission oil cooler integral with radiator and heavy duty condenser
- Engine oil cooler (external)
- Power steering fluid cooler (external)
- Delcotron 140 amp Alternator (See page 17 for specifications)
- Maintenance Free 770 CCA heavy-duty battery (See page 17 for specifications)
- Special calibrated transmission (use overdrive for high speed driving)
- Air Conditioning wide open throttle cut-off
- Air Conditioning head pressure relief
- Transmission Low Gear Blockout (prevents manual downshift to first gear)
- Wiring Provision for Headlamp Flashing Unit (also used with Option 6J3)
- Special Balanced Drive Shaft
- Hoses - silicon radiator and heater includes worm drive hose clamps
- Digital Speedometer Certified 1 MPH increments 0 to 199 MPH, includes: Trip Odometer, Gauges (Oil, Temp, Volts) plus Warning Lights and Speedometer light off switch
- Anti-Corrosion Hot Melt Pads under front and rear floor insulators
- Radio Bonding Strap Package
- Wiring Provision for Horn/ Siren Circuit Connection (also used with Option 6J4)
- Auxiliary Junction Block in engine compartment
- Trunk Opener, electric left-side of steering column near headlight switch
- Single Key Locking System - random key code for each vehicle; one key operates ignition and all other locks. (For single key to operate entire fleet, see Fleet Coded Single Key Locking System on page 6.)
- Heavy duty bench seats with front seat armrest - cloth trim
- Auxiliary Fuse Block provides six additional fused circuits at 20 amps each (See description on page 9)
- 15 x 7 H/D Steel Wheels
- Bolt on center hub caps

Caprice Classic 'LS' Police Package

To order Caprice Classic 'LS' Police Package, model 1BN19 and Base Equipment Group BNAB plus 9C1 must be ordered. Refer to pages 5, 6 and 7 for option availability.

Note: Special paint is not available on the Caprice Classic 'LS'

Powertrain Combinations

Powertrains Available (must order one)

| ENGINES | TYPE | DISPLACEMENT LITERS/CU. IN. | ENGINE FUEL SYSTEM | TRANSMISSION | AXLE RATIO |
|--------------------------------------|------|--------------------------------|--|---|---------------|
| L99 Standard Single Exhaust | V8 | 4.3/265 | Sequential Fuel Injection | MXO 4L60E Electric 4-speed Auto w/OD | *3.23 |
| L99 Optional Bi-Fuel KL6 | V8 | 4.3/265 | Primary Natural Gas Secondary Gas | MXO 4L60E Electric 4-speed Auto w/OD | *3.23 |
| LT1 Optional Dual Exhaust | V8 | 5.7/350 | Sequential Fuel Injection | MXO 4L60E Electric 4-speed Auto w/OD | *3.08 |

* Limited slip is available with these axles by ordering option G80.
See page 17 for engine specifications.

Tires: Speed Rated (must order one)

INCLUDED with 9C1 Police Package

| SEO No. | MANUFACTURER | QUANTITY | SIZE | SPEED RATING | TYPE |
|-----------|--------------|----------|--------------------------|--------------|---------------------------|
| 5AQ & R4Y | Goodyear | Five | P225/70R15 SBR Blackwall | H | All Season (Eagle GT + 4) |
| 5AQ & R4Z | General | Five | P225/70R15 SBR Blackwall | H | All Season (XP2000AS) |

OPTIONAL with 9C1 Police Package

| SEO No. | MANUFACTURER | QUANTITY | SIZE | SPEED RATING | TYPE |
|-------------|--------------|----------|------------------------------|--------------|---------------------------|
| QQG & R4Y * | Goodyear | Five | P235/70R15 SBR Blackwall | V | All Season (Eagle GT + 4) |
| QQG & R4Z * | General | Five | P235/70R15 SBR Blackwall | V | All Season (XP2000AS) |
| QQR* | Goodyear | Five | P235/70R15 SBR White Stripe | V | All Season (Eagle GT + 4) |
| 5AN | General | Five | P225/70R 15 SBR White Stripe | H | All Season (XP2000AS) |

* Required with LT1 (5.7L) Engine. If P225/70R15 tires are ordered with the LT1 (5.7L) Engine, option VZ2 Speed Limiter (130 mph) is required.

Note: Speed ratings at 35 psi; 'H' rating 130 mph, 'V' rating 149 mph.

Seats:

Caprice Classic

Heavy Duty Seats-Front and Rear

(Not available on Caprice Classic 'LS')

| SEAT TYPE | VINYL (FRONT/REAR) | | CLOTH (FRONT/REAR) | | CLOTH-FRONT VINYL-REAR | | POWER SEATS AVAILABLE |
|--|--|------|--------------------|------|------------------------|------|-------------------------------|
| Full Bench A52 (Inc. w/9C1) | Med. Blue | GDD1 | Med. Blue | PDD1 | Med. Blue | TDD1 | N/A |
| | Med. Beige | GEE1 | Med. Beige | PEE1 | Med. Beige | TEE1 | |
| Split 45/45 AS7 w/reclining seat back | Med. Blue | GDD4 | Med. Blue | PDD4 | Med. Blue | TDD4 | *Driver Only |
| | Med. Beige | GEE4 | Med. Beige | PEE4 | Med. Beige | TEE4 | |
| Split 55/45 AM6 w/armrest, reclining seat back | Med. Blue | GDD5 | Med. Blue | PDD5 | Med. Blue | TDD5 | *Driver and Passenger w/o 6C9 |
| | Med. Beige | GEE5 | Med. Beige | PEE5 | Med. Beige | TEE5 | |
| | Ruby | GFF5 | Ruby | PPF5 | Ruby | TFF5 | |
| | Gray | GQQ5 | Gray | PQQ5 | Gray | TQQ5 | |
| Full Bench Rear | Heavy-Duty Rear Seat is included when Heavy-Duty Front Seat is Ordered | | | | | | |
| | Color Selected for Front Seat Determines Rear Seat Color | | | | | | |

* AA7 Power Windows are required with AG 1 Power Seats

Note: Trim material will be same cloth as standard Caprice Classic cloth.

Caprice Classic 'LS'

Non-Heavy Duty-Front and Rear

(Not available on Caprice Classic)

| SEAT TYPE | CLOTH (STANDARD) | LEATHER | POWER SEATS AVAILABLE |
|--|------------------|----------------|---|
| Split 55/45 with Armrest reclining seat back AM6 | Med. Blue FDD5 | Dark Blue ADD5 | Driver Standard and Passenger Available |
| | Med. Beige FEE5 | Beige AEE5 | |
| | Gray FQQ5 | Gray AQQ5 | |
| | Ruby FFF5 | Ruby AFF5 | |

Note: Trim will be same as Caprice Classic 'LS'

Special Equipment Options

| No. | Description | Caprice Classic | Caprice Classic 'LS' |
|-----|--|-----------------|----------------------|
| 6F8 | ASHTRAY- Auxiliary, located in front doors | O | N/A |
| KL6 | BI-FUEL NATURAL GAS CONVERSION- (Reqs. 3.23 axle and P225/70R15 tires) | O | N/A |
| 6C9 | CONDUIT- Routed from dash to trunk. Requires 6A3 (N/A with AG2 Power Seat) | O | N/A |
| KD1 | COOLER- Auxiliary external transmission oil (incl. with 5.7L engine) | O | O |
| 6A3 | COVERING- Rubber floor replaces production carpeting | O | N/A |
| 6N1 | HANDLE- Inside driver door releases lock when opening door | O | O |
| 6B2 | HANDLES- Rear door inoperative (doors can only be opened from outside) | O | O |
| 6N5 | HANDLES- Rear window inoperative | O | O |
| 6B7 | HOLE IN ROOF- On centerline (Reqs. 6F5 wiring) N/A with 6J5 hole | O | O |
| 6J5 | HOLE IN ROOF- On right side (Reqs. 6F5 wiring) N/A with 6B7 hole | O | O |
| 6A4 | KEYS- Single key system, each vehicle coded different (random key code) | S | S |
| 6A5 | KEYS- Single key system, entire fleet coded alike (specific key code) | O | O |
| 6E2 | KEYS- Single key system, entire fleet coded alike (specific key code) | O | O |
| 6E8 | KEYS- Single key system, entire fleet coded alike (specific key code) | O | O |
| 6C7 | LAMP- Front Auxiliary dome | O | O |
| 7Y2 | LAMP- Door open warning (N/A with 7Y6 lamp inoperative) | O | N/A |
| 7Y6 | LAMP- Inoperative dome (N/A with 7Y2 lamp inoperative) | O | O |
| 6J6 | LIGHTS- Rear window shelf | O | O |
| T53 | LIGHTS- Alternate Flashing Trunk Lid Warning | O | O |
| 6N6 | LOCKS- Rear door inoperative | O | O |
| B48 | MAT- Rubber trunk | O | N/A |
| B81 | MOLDING DELETE- All Body side | O | N/A |
| 6Y1 | MOLDING NON-INSTALLED- Body side, front doors only | O | O |
| 6G2 | ROOF REINFORCEMENT- Plate located on centerline of vehicle | O | O |
| B46 | TRIM- Deluxe trunk | O | S |
| 8X3 | SHOCKS- Bilstein (replaces production shocks) | O | O |
| VZ2 | SPEED LIMITER- Required with 5.7 Liter engine when P225/70R15 tires are ordered | O | O |
| 7X6 | SPOTLIGHT- Left hand | O | O |
| 7X7 | SPOTLIGHTS- Left and right hand | O | O |
| 7X8 | SPOTLIGHT PROVISION- Left hand | O | O |
| 7X9 | SPOTLIGHT PROVISION- Left and right hand | O | O |
| 6B4 | TIRE RELOCATION- Spare tire relocated | O | O |
| 6H6 | TRUNK OPENER- Right side of steering column (lower right of radio) | O | O |
| 6H7 | TRUNK OPENER- Left side of steering column (near headlight switch) | S | S |
| WX7 | WIRING- Auxiliary speaker | O | O |
| 6C8 | WIRING- Coaxial radio antenna cable | O | O |
| 6J3 | WIRING- For grille lights, flasher, speakers and headlamp flashers | O | O |
| 6J4 | WIRING- For horn/siren circuit | O | O |
| 6J1 | WIRING- Ignition and main power supply (Replaces 7Z5 fuse block included in 9C1) | O | O |
| 6F5 | WIRING- Roof 10 wire (Requires 6B7 or 6J5 hole in roof) | O | O |

N/A = Not Available; O = Optional; S = Standard

For Detailed Descriptions of Special Equipment Options, see pages 8 thru 16.

Note: VASCAR adapter not available from Chevrolet. Contact Traffic Safety Systems Inc. (Manufacturer of Vascar) at 804-353-3826 to purchase Vascar Electronic Odometer Module.

Regular Production Options

| No. | Description | Caprice Classic | Caprice Classic 'LS' |
|-----|---|--------------------|----------------------------|
| AG1 | ADJUSTER- Six-way power seat, driver (Requires AA7 power windows) | O | S |
| AG2 | ADJUSTER- Six-way power seat, passenger; N/A with SEO 6C9 (Requires AG1) | O | O |
| U75 | Antenna - Power | N/A | N/A |
| G80 | AXLE- Rear, limited slip differential | O | O |
| C49 | DEFOGGER- Rear window (N/A with DL8 mirrors) | O | O |
| AU3 | DOOR LOCKS- Power | O | S |
| T82 | HEADLAMPS- Automatic on-off | N/A | N/A |
| KO5 | HEATER- Engine block | O | O |
| AUO | KEYLESS ENTRY | N/A | N/A |
| C71 | LAMPS- Front door courtesy | N/A | S |
| T87 | LAMPS- Cornering | N/A | N/A |
| VK3 | LICENSE PLATE BRACKET- Front | O | O |
| BF9 | MAT DELETE- Carpeted front & rear | O | O |
| DC4 | MIRROR- Inside rearview day/nite, with reading lamps | O | S |
| DF6 | MIRROR- Inside rearview automatic day/nite, with reading lamps | O | O |
| DL8 | MIRRORS- Heated electric outside rear view | N/A | N/A |
| D64 | MIRRORS- Lighted vanity | N/A | N/A |
| DG7 | MIRRORS- Outside dual electric remote (Requires AU3 power door locks) | O | S |
| AP9 | NET- Luggage area hold-down | O | S |
| D84 | PAINT- Two tone (Regular production paint only) | O | N/A |
| D90 | PIN STRIPING- Body side (N/A with special paint) | O | S |
| UL5 | RADIO DELETE- Speakers, speaker wires and antenna remain | O | O |
| U1C | RADIO- AM/FM seek-scan compact disc with digital clock | N/A | O |
| UM6 | RADIO- AM/FM stereo, seek/scan with cassette and digital clock | O | S |
| K34 | SPEED CONTROL- Electronic, with resume speed | O | S |
| V92 | TRAILERING PACKAGE | N/A | N/A |
| B18 | TRIM- Deluxe interior | N/A | S |
| A90 | TRUNK OPENER- Located in glove compartment | N/A | N/A |
| N91 | WHEEL COVERS- Wire with locks | O | S |
| PB1 | WHEEL COVERS- Deluxe(Plastic) | O | N/A |
| P03 | WHEEL COVERS- Full stainless steel | O | N/A |
| AA7 | WINDOWS- Power with driver express down and passenger lock-out switch on driver's door | O | S |

N/A = Not Available; O = Optional; S = Standard

1994 Specifications and Dimensions

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

| GENERAL | |
|-----------------|-------|
| Wheelbase: | 115.9 |
| Overall length: | 214.1 |
| Overall width: | 77.0 |
| Overall height: | 55.7 |
| Tread Front: | 61.8 |
| Tread Rear: | 62.3 |

| FRONT COMPARTMENT | |
|---------------------|------|
| Head room: | 39.2 |
| Shoulder Room: | 63.4 |
| Hip Room: | 57.0 |
| Leg Room: (Maximum) | 42.2 |

| REAR COMPARTMENT | |
|---------------------|------|
| Head Room: | 37.9 |
| Shoulder Room: | 63.4 |
| Hip Room: | 56.9 |
| Leg Room: (Minimum) | 39.5 |

| LUGGAGE COMPARTMENT CAPACITY | |
|--|-------|
| Luggage capacity (with space-saver) (cu. ft.) | 20.4 |
| EPA passenger compartment volume index (cu. ft.) | 114.2 |

| FUEL TANK CAPACITY | |
|--------------------|------|
| (gal.) | 23.0 |

| AERODYNAMICS | |
|---------------------|-----|
| Coefficient of drag | .34 |

| EPA FUEL ECONOMY RATINGS | CITY/HIGHWAY |
|--------------------------|--------------|
| 4.3L Engine | 17/26 |
| 5.7L Engine | 17/25 |


Projected EPA label values, actual mileage will vary with options, driving conditions, driving habits and vehicle's condition.

| ALTERNATOR | |
|-------------|--------------|
| Type: | Delco CS-144 |
| Amps | 140 |
| Amps @ idle | 72/108 |

FEATURES:

- Sealed High Capacity Bearings
- Transient Voltage Spike Protection
- Low Power Consumption
- Vehicle Low Voltage Idle Boost Compatible
- Load Response Control
- Reduced RFI

CHEVROLET POLICE V8 GENERATOR MAXIMUM OUTPUT

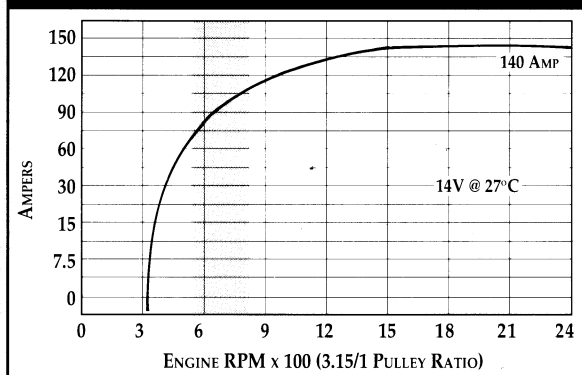

COMPUTER CONTROLLED IDLE SPEED RANGE (575-800 RPM)

| ENGINE | STD. | OPT. |
|--------------------------------|------------|------------|
| Type: | (L99) V8 | (LT1) V8 |
| Displacement: Liters (cu. in.) | 4.3 (265) | 5.7 (350) |
| Horsepower/RPM: | 200 @ 5200 | 260 @ 5000 |
| Torque/RPM: | 245 @ 2400 | 330 @ 3200 |
| Induction System: | SFI | SFI |
| Compression Ratio: | 9.9:1 | 10.0:1 |
| Exhaust: | Single | Dual |

| TRANSMISSION | |
|--------------------------|---------|
| Automatic with overdrive | 4-speed |

| BRAKES | |
|----------------------------------|---------------------|
| Dual hydraulic, power system | Disc/Disc |
| Front: size/swept area (sq. in.) | 12" x 1" / 242.3 |
| Rear: size/swept area (sq. in.) | 11.6" x .8" / 197.3 |
| Total brake-swept area (sq. in.) | 439.6 |

| TIRES | |
|---|------------------------|
| Type: | All Season Speed Rated |
| Size: with 4.3 liter engine ('H' Rated) | P225/70R15 |
| Size: with 5.7 liter engine ('V' Rated) | P235/70R15 |

| WHEELS | |
|--------|--------------|
| Type: | Vented Steel |
| Size: | 15 x 7 |

| CHASSIS | |
|-------------------|---|
| Frame: | Full Perimeter Steel |
| Front Suspension: | Independent - SLA, Coil Steel Alloy Spring, Steel Anti-Roll Bar, Tuned Shocks |
| Rear Suspension: | Salisbury 4-Link, Coil Steel Alloy Spring, Steel Anti-Roll Bar, Tuned Shocks |
| Steering Type: | Power, Internal Gear with Power piston Vane Type Pump |
| Steering Ratio: | 12.7:1 |

| BATTERY | |
|-----------------------------------|---------------|
| Type: | Delco Freedom |
| BCI Group Size: | 78 |
| Volts | 12 |
| Cold Cranking Amps @ 0°F (-18°C): | 770 |
| Reserve Capacity @ 80°F (27°C): | 115 |

FEATURES:

- Maintenance-Free Design
- Built-In Hydrometer
- Reinforced Polypropylene Case
- Built-In Flame Arrester
- Side Mounted Terminals